

ASAB



Sabtape

Premium drip tape



01.2017

 **SYSTEM GROUP**

Details make the difference

Ampia gamma di portate, spaziature e spessori

Wide selection of flow rates, spacing and wall thicknesses

- ✓ Grand choix de débits, espacements et épaisseurs
- ✓ Amplia gama de caudales, espacios entre goteros y espesores
- ✓ Широкий ассортимент расходов, расстояний и толщин

Ottima uniformità di erogazione

Excellent water distribution

- ✓ Excellent uniformité de distribution
- ✓ Óptima uniformidad de suministro de agua
- ✓ Оптимальный равномерный расход

Elevata tolleranza all'occlusione

High clogging resistance

- ✓ Résistance au bouchage très élevée
- ✓ Alta resistencia a la obstrucción
- ✓ Высокая устойчивость к засорению


Labirinto ad ampia sezione

Large section labyrinth

Labyrinthe à section large

Laberinto de sección amplia

Лабиринт широкого сечения

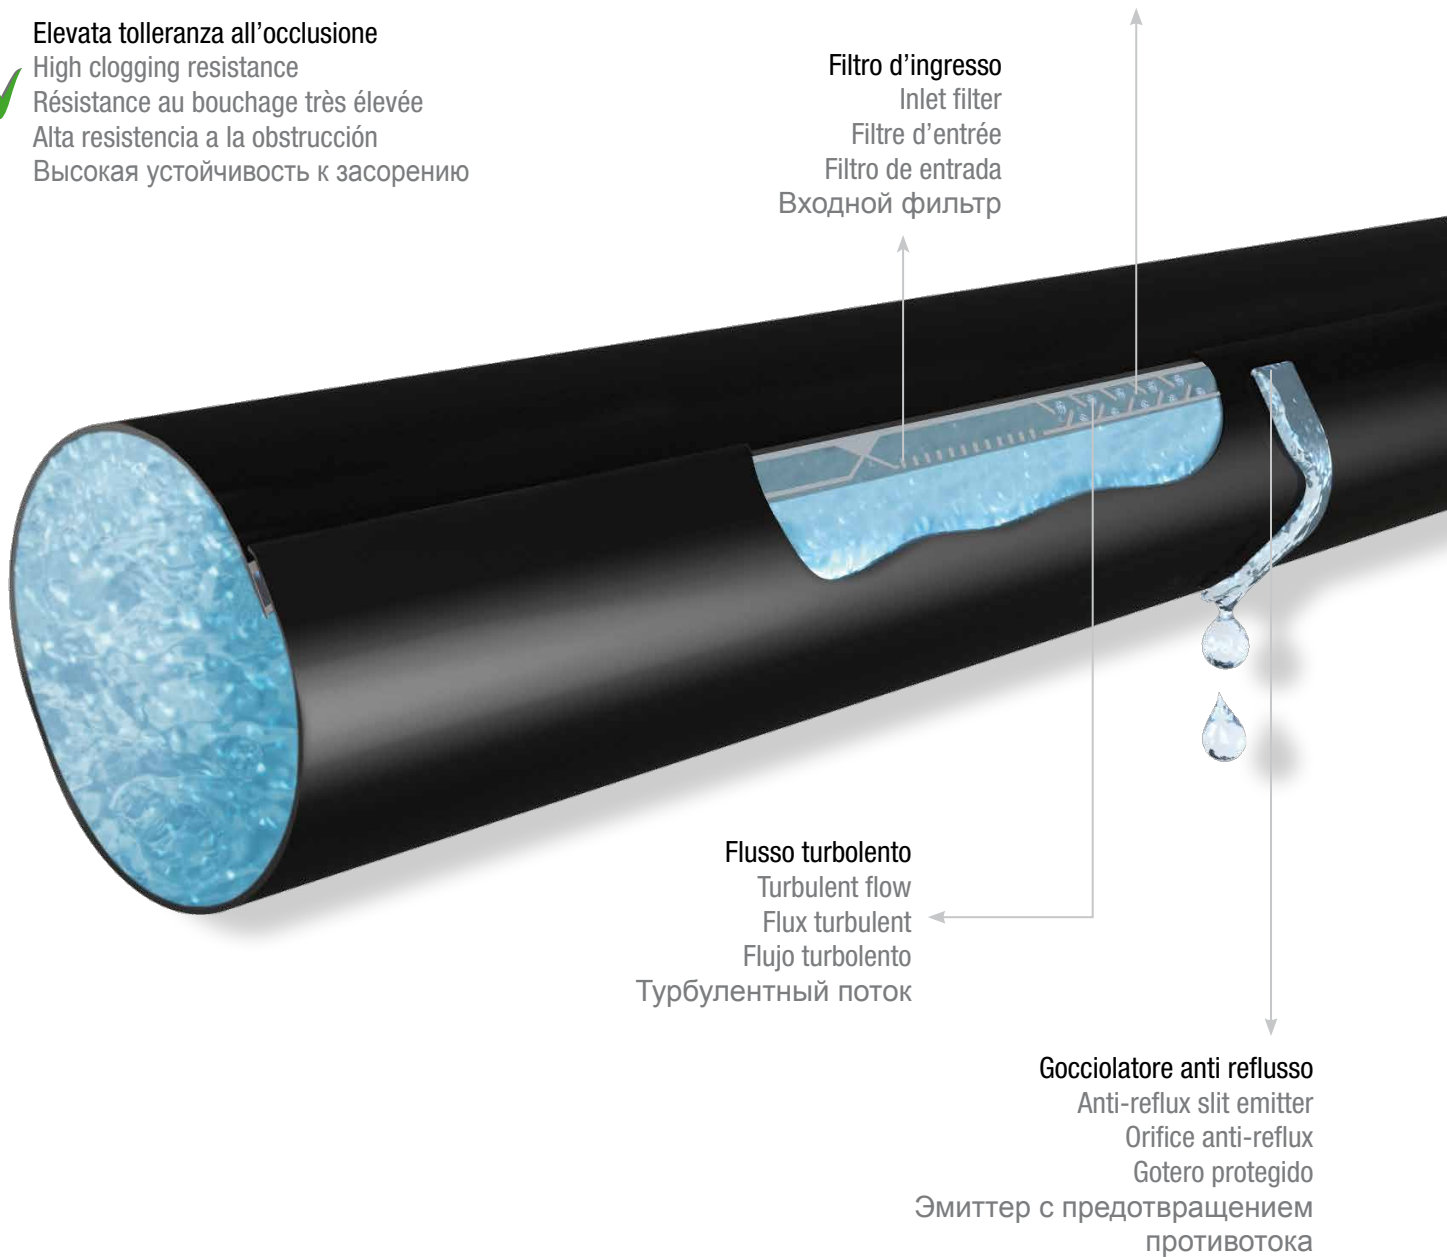

Sabtape
Premium drip tape

Product features

Sabtape

Premium drip tape

Ø 16 mm



filtrazione richiesta

filtration required
filtrage recommandé
filtración requerida
требуемый уровень фильтрации

100 micron
150 mesh

Dati tecnici

Technical data / Donnes techniques / Datos Técnicos / Технические данные

Ø	spessore thickness épaisseur espesor Толщина			pressione esercizio working pressure pression d'exercice presion de trabajo Рабочее давление		packaging			
	mm	mil	mm	bar	bar max	m	m	m	m
16	5		0,125	0,7	0,9	3500	1750	-	-
16	6		0,150	0,7	0,9	3000	1500	200	100
16	7		0,175	0,7	1,0	2600	1300	200	100
16	8		0,200	0,7	1,0	2200	1100	200	100
16	10		0,250	0,7	1,2	1800	900	-	-
16	12		0,300	0,7	1,5	1500	-	-	-

Lunghezza ala

Tap lengths / Longueurs de rampe / Longitud de ala / Длина ленты

portata flow rate débit caudal расход	efficienza efficiency efficacité eficacia эффективность	distanza tra i gocciolatori drifter spacing distance entre les orifices separacion entre goteros Расстояние между капельницами			
		10 cm	20 cm	30 cm	40 cm
0,6	85	150	230	300	360
1,0	85	100	156	200	238
1,5	85	85	124	154	183
0,6	90	126	189	240	290
1,0	90	90	135	171	200
1,5	90	70	100	130	150

Sabtape

Premium drip tape

Ø 22 mm



filtrazione richiesta

filtration required
filtrage recommandé
filtración requerida
требуемый уровень фильтрации

100 micron
150 mesh

Dati tecnici

Technical data / Donnes techniques / Datos Técnicos / Технические данные

Ø	spessore thickness épaisseur espesor Толщина			pressione esercizio working pressure pression d'exercice presion de trabajo Рабочее давление		packaging			
	mm	mil	mm	bar	bar max	m	m	m	m
22	6		0,150	0,7	0,9	2200	1100	-	-
22	7		0,175	0,7	1,0	2000	1000	-	-
22	8		0,200	0,7	1,0	1700	-	-	-
22	10		0,250	0,7	1,2	1300	-	-	-

Lunghezza ala

Tap lengths / Longueurs de rampe / Longitud de ala / Длина ленты

portata flow rate débit caudal расход	efficienza efficiency efficacité eficacia эффективность	distanza tra i gocciolatori drifter spacing distance entre les orifices separacion entre goteros Расстояние между капельницами		
		20 cm	30 cm	40 cm
0,6	85	430	550	664
1,0	85	300	360	495
1,5	85	220	270	370
0,6	90	340	440	540
1,0	90	260	330	405
1,5	90	190	245	304

POMODORI

- tomatoes
- tomates
- tomates
- томаты



CETRIOLI

- cucumbers
- concombres
- pepinos
- огурцы



MAIS

- corn
- maïs
- maiz
- кукуруза



ZUCCHINE

- zucchini
- courgettes
- calabacines
- кабачки



CIPOLLE

- onions
- oignons
- cebollas
- лук



FRAGOLE

- strawberries
- fraises
- fresas
- клубника



COCOMERI

- watermelons
- pastèque
- sandias
- арбуз



MELONI

- melons
- melons
- melones
- дыни



Packaging



Standard pallet: 24 coils
cm 100x100x200 - kg 650

Full truck (13,60 m):

26 standard pallets (624 coils)

Export pallet: 28 coils
cm 100x100x230 - kg 750

20' container: 420 loose coils - 10 export pallets (280 coils)

40' container: 840 loose coils - 24 export pallets (672 coils)



SAB



Fano



Ancona




Fano



Ancona - Falconara

SAB products:



SAB

SYSTEM GROUP
www.tubi.net

SAB S.p.A.
via Salvo D'Acquisto | 61048 Sant'Angelo in Vado (PU) - Italy
ph +39 0722 810800 | fax +39 0722 810158
sab@tubi.net | www.sabspa.com

